




Directional Coupler Spec

P/N	CUL-0410-3dB/5dB/7dB	CUL-0410-8dB/9dB/10dB/11dB/15dB/20dB
Frequency Range(MHz)	457-930	457-930
Coupling(dB)	± 0.5	± 0.7
Direction (dB)	≥ 20	≥ 20
VSWR	≤ 1.25	≤ 1.25
Power	50	
Connector	NK	



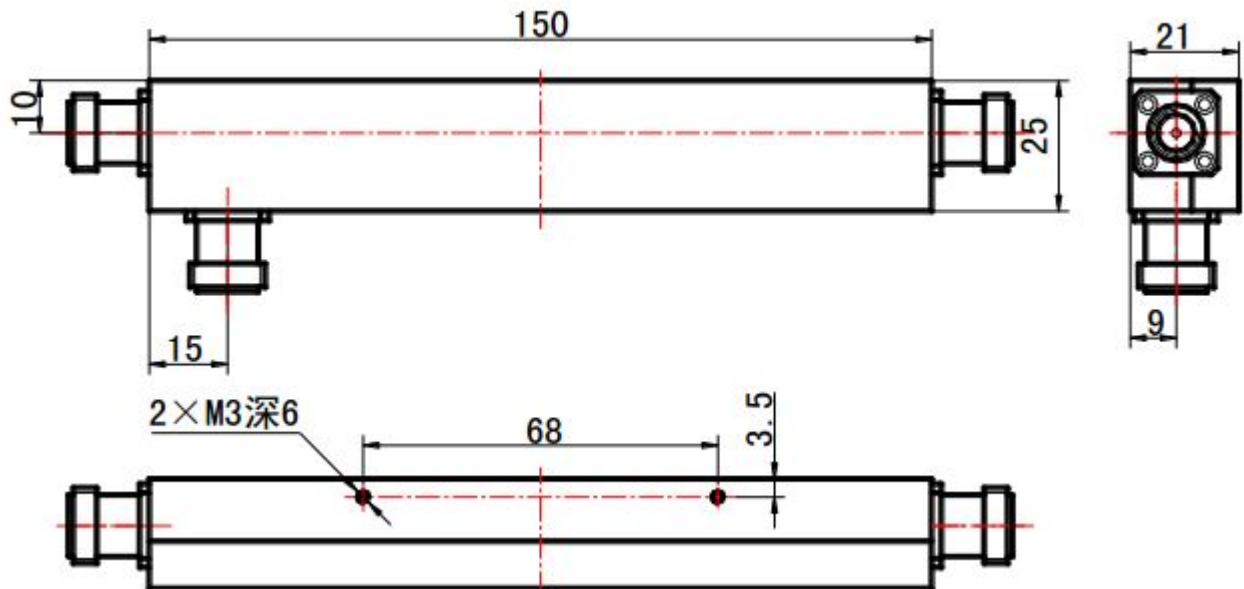

Directional Coupler Spec

P/N	CUL-0410-40dB	CUL-0410-30dB
Frequency Range(MHz)	450-470	
Coupling(dB)	± 0.8	
Direction (dB)	≥ 20	
VSWR	≤ 1.25	
Power	50	
Connector	NK	

